



064-023-2639  
Environmentally Preferred Flooring



The Best Click-Floor  
For Bare Foot Walking

# CLICKPRO<sup>®</sup> MEDALLION<sup>™</sup>

Collection 2025/26

## Floors For Great Interior


- phthalate free
- formaldehyde free
- easy maintenance
- waterproof surface
- abrasion resistant
- underfoot comfort
- slip resistant
- sound absorption
- indentation residual
- stain resistant
- fire reaction B<sub>fl-s1</sub>
- residential & commercial use
- termite retardant
- antimicrobial surface

Made from 100% virgin PVC and EU approved non - phthalate plasticizer (DOTP)

# Product Structure

## MEDALLION LVT CLICK

Floors For Great Interior

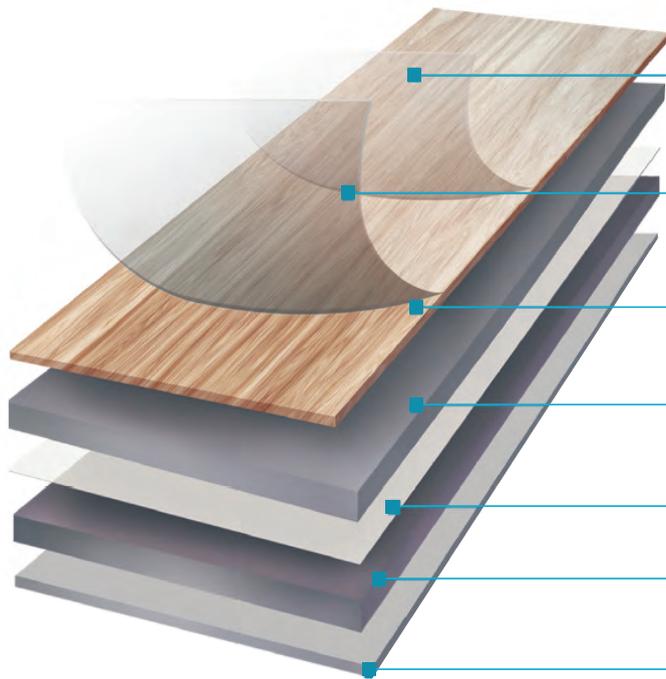

### Special Coating

Factory applied UV cured urethane reinforced with ceramic beads and pro-maintenance properties.

### Wear Layer

This transparent layer protects against wear. The embossing texture enhances the realism of the floor design.

### Print Film

Handpicked to provide greatest resemblance of wood, stone and concrete.

### Thickness Core (Upper Layer)

Superior dimensional stability is achieved by using an innovative eco friendly stabilizer formula.

### Glass Fiber Layer

Further enhances the dimension stability of the product.

### Thickness Core (Lower Layer)

Provides for product thickness and performance. Tongue and groove interlocking edges for a glueless installation.

### Backing Layer

This special layer provides elasticity for greater underfoot comfort and also acts as a balancing layer.

All layers are thermally fused through hot pressing and undergone stabilization process yielding a high quality product.

## BENEFITS OF MEDALLION



### SAFE - Eco friendly and non-toxic

- Use environmentally friendly DOTP plasticizer
- Does not contain harmful heavy metals
- Meet the European standards of product VOC emission



### COMFORT OF USE

- Comfortable for bare footed walking
- Easy on the knee for playing children
- Visually pleasing design and colours



### EASE OF MAINTENANCE

- Dual UV coats to repel dirt and beverages spill
- Unique surface embossed for easy sweeping and mopping
- Ceramic beads included for superior scuff resistance




### PEACE OF MIND

- Made of 100% virgin PVC
- 10 years warranty against manufacturing defects


## MEDALLION



CMD 5101 W Banff

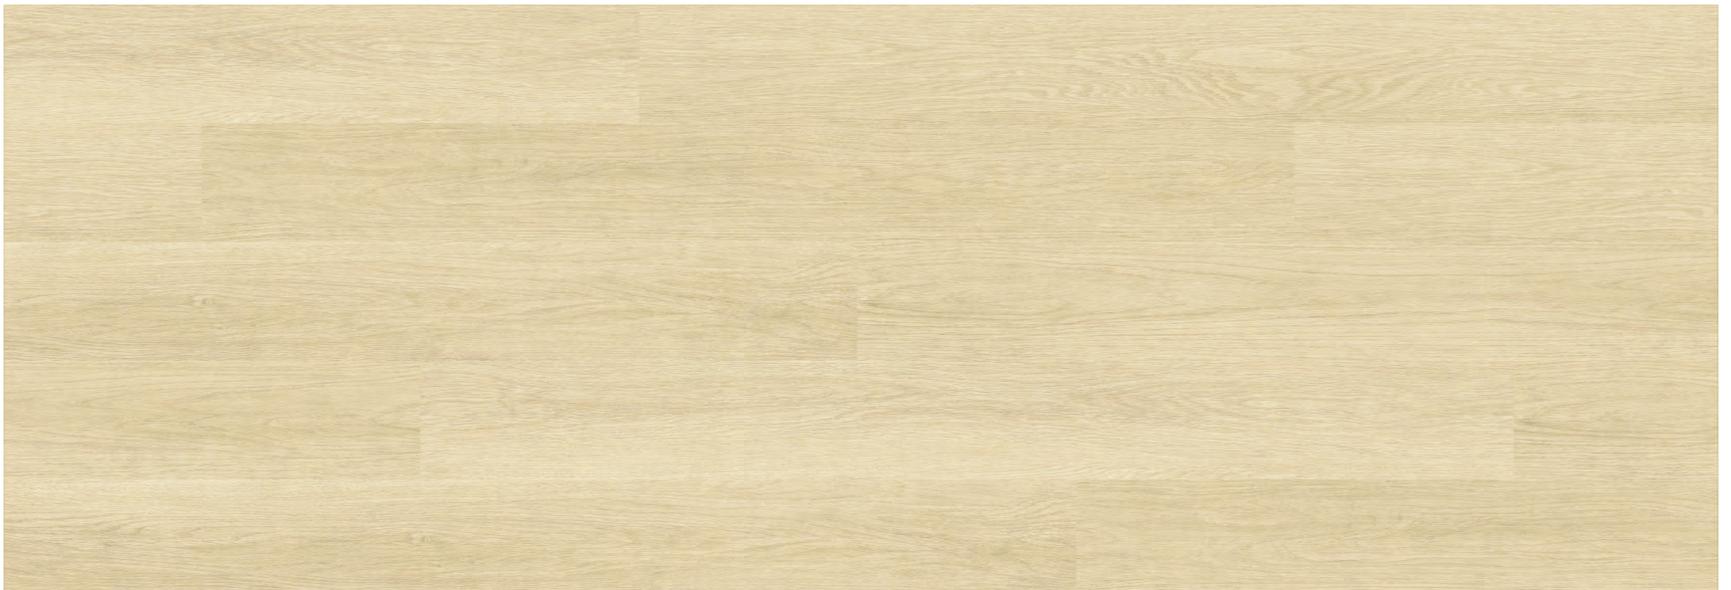

CMD 5113 W Capri

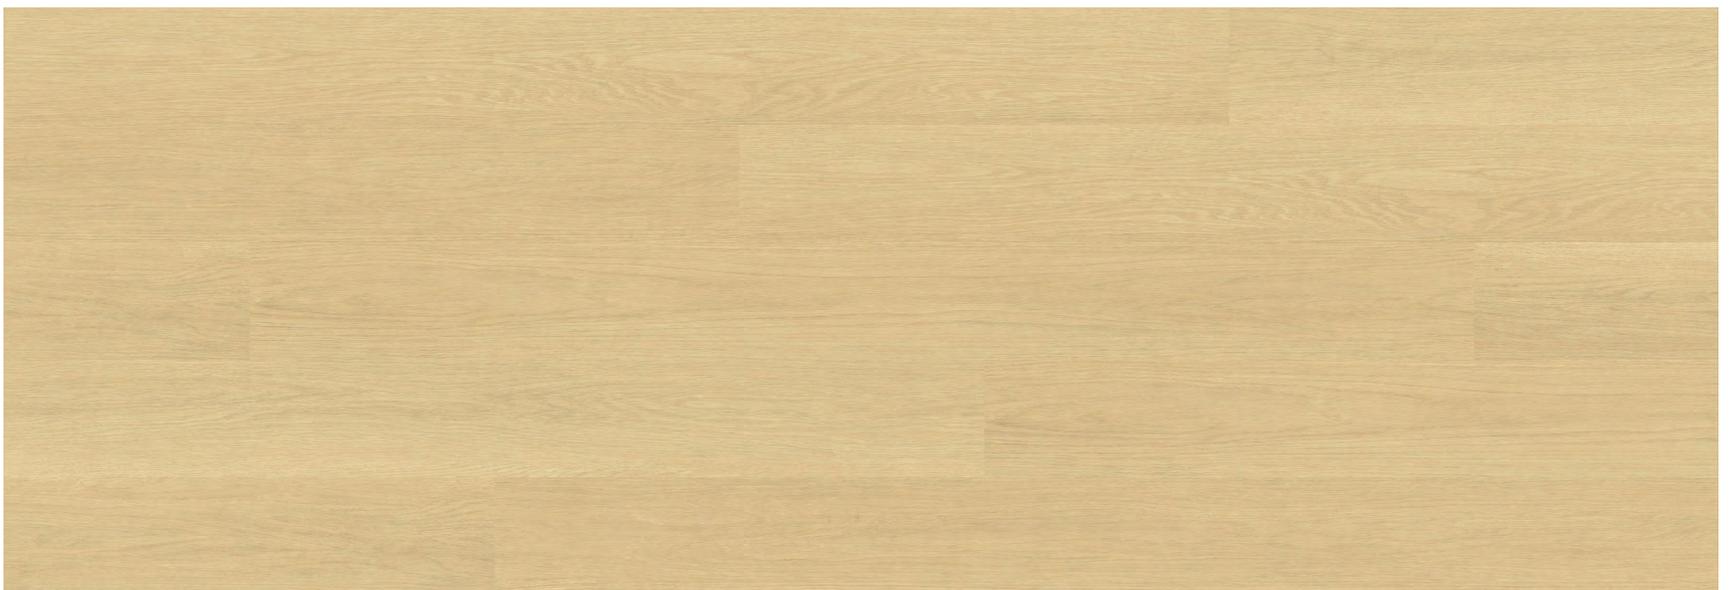

CMD 5128 W Lofoten


## MEDALLION



CMD 5135 W Socotra



CMD 5169 W Monteverde

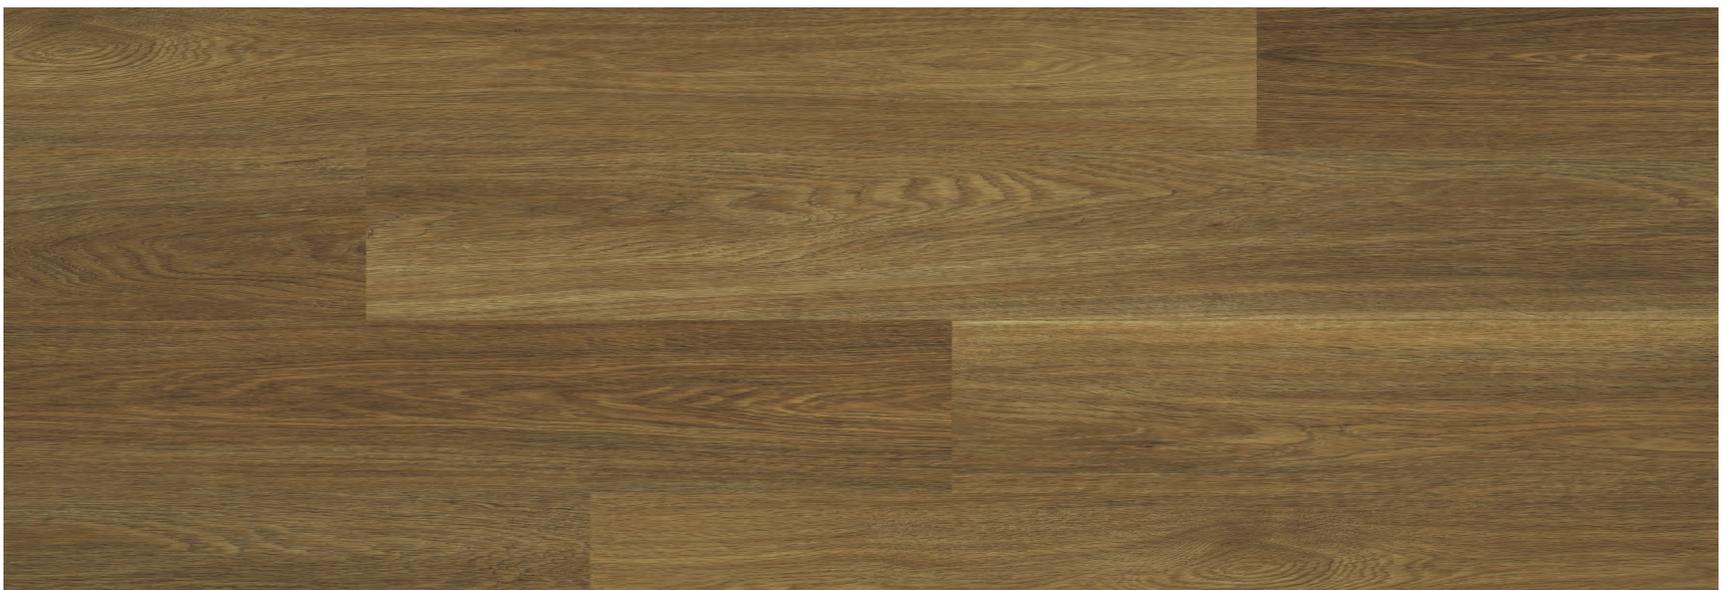


CMD 5152 W Arashiyama

**CLICKPRO<sup>®</sup>**

Size : 305 x 610 x 5 mm  
Wearlayer : 0.5 mm  
Anti-scuff easy clean coating

## MEDALLION

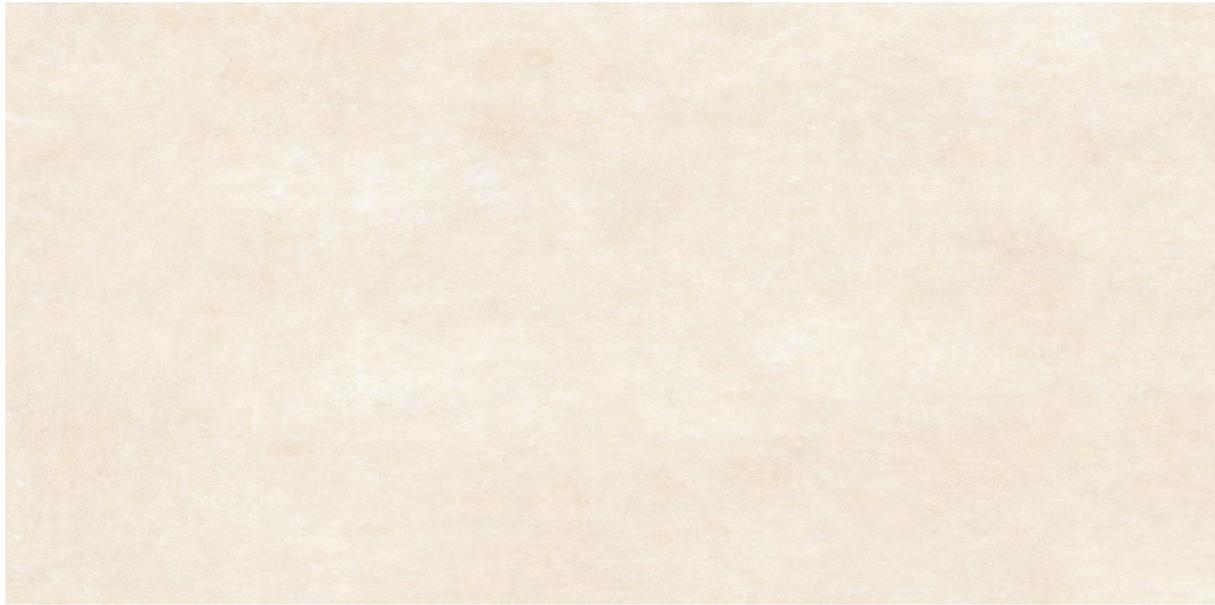

CMD 5268 T Valais



CMD 5255 S Matterhorn



# CLICKPRO<sup>®</sup> MEDALLION<sup>™</sup>

## The Benefits

MEDALLION planks and tiles are high performance floating floor made from high quality vinyl. The aesthetics of hard wood and natural stone are now combined with the resistance of pure vinyl to scratches, scuffing, stain and dirt. MEDALLION surface is impervious to water and can be deployed in places that receive spills. With its slip resistance surface and underfoot resilience, you can enjoy walking on it barefoot. Being glueless, it is also eco friendly to install and contributes to improved indoor air quality. The aesthetics are unsurpassed with the natural wood emboss and non-repeat wood pattern at the two ends of each plank and tile. The surface is coated with anti-scuffing properties. MEDALLION LVT click offers superior impact sound insulation as compared to other click system such as SPC and laminated floors. With easy maintenance, CLICKPRO are floors for great interior.

## Application

MEDALLION can be installed in residential and light commercial area. In residential, it can be fitted in the bedroom, study, living and dining area. It can also be installed in dry kitchen and entrance of bathroom by sealing the perimeter edges with silicon caulk. It can be readily installed over existing hard surfaces and in moist area where wood flooring and glue-down products are off limit. For light commercial use, MEDALLION can be installed in light traffic offices, retail shops and childcare centres. For more dense traffic, use product with thicker wear layer.

## Installation & Care

**Before install check list** \*Substrate must be structurally stable, flat and smooth. \*Check floor level variation is <3.0mm across any 1.2 meters. \*Check subfloor moisture level must be <90%RH. \*Floor to be acclimatized on site 12 hours at room temperature before installing. \*Height variation between ceramic tiles, plywood and any other existing flooring must be patched and levelled before laying over with new click flooring. \*For areas with rolling load and high foot traffic, thicker product thickness should be used. \*All carton boxes, planks and tiles must be stored completely flat on hard surface.

**During install check list** \*For every 5 meters room length, leave a 2mm wall gap. \*Leave an expansion gap every 15 meters. \*All joints must be properly adjoined. \*For wet area use, fill the perimeter gaps with high quality silicone caulking.

**Notes to end user** \*Do not spread excess water such that they seep into wall gaps. \*Avoid exposure to long period of peak hours direct sunlight without protection of shades. \*Do not drag heavy furniture across the surface. \*For the use of chair with castor wheel, a protective surface pad is recommended.

**Maintenance** \*Floors should be swept or vacuum regularly to remove loose dirt. \*Damp mop as needed using clean water and a PH neutral floor cleaner. Cleaner should be free of ammonia and hydrochloric acid. \*Aging floor can be restored by machine buffing and polishing.

## Product Specifications

CLASSIFICATION	STANDARDS		MEDALLION
Size	ISO 24342	mm	Plank : 226 x 1220 mm   Tile : 305 x 610 mm
Thickness	ISO 24346	mm	5.0 mm ( Micro-Bevelled Edge )
Wear layer	ISO 24340	mm	0.50 mm ( with ceramic beads & easy clean properties )
Curling	ISO 23999	mm	≤2 mm
Packing	-	Carton	8 planks / box (2.21 m <sup>2</sup> )   12 tiles / box (2.23 m <sup>2</sup> )
Dimensional stability	ISO 23999	%	≤2
Residual Indentation	ISO 24343-1	mm	≤0.1mm
Effect of castor chair	ISO 4918	-	No visible damage
Abrasion resistance	EN 660-2	mm <sup>3</sup>	Weargroup : T
Stain resistance	ISO 26987	Index	Complied
Classification ( level of use )	EN 429	Class	Heavy domestic ( class 23 ) General commercial ( class 32 )
Impact sound insulation	ISO 717-2	dB	6
Colour fastness	ISO 105-B02	Degree	>6
Fire classification	EN 13501-1	Class	Bfl-S1 ( flame spread / smoke )
Electrical propensity	EN 1815	kV	< 2
Cigarette burn resistance	EN 1399	Class	Class 3
Formaldehyde emission	EN 717-1	mg/m <sup>2</sup>	Not detected
Pentachlorophenol	EN 14041	mg/kg	Not detected
Heavy metal	EN 71 Part 3	mg/kg	Not detected
Slip resistance	SS 485 ( Dry friction ) SS 485 ( Wet friction )	COF CI	≥0.4 Class X ( 35 to 44 )
Phthalate	EN 14372 : 2004	mg/kg	Not detected
Antimicrobial activities	ISO 22196 ISO 846	Bacteria Fungi	>99% reduction ( ATCC 6538P / 8739 ) No growth observed ( ATCC 6205 / 6275 / AS3.2942 / 3875 / 3984 )

MEDALLION offers a 10 years warranty against manufacturing defects.

By following the installation and care, CLICKPRO will provide a beautiful and lasting floor for many years to come.